



Yotta Mini-Sport

- o 4Gbps Fibre or U320 host connection
- o Support greater than 2TB per Volume set
- o Firmware-embedded web Browser-RAID manager.
- o Ultimate RAID Level 6 Protection
- o Online Capacity expansion, RAID Level migration
- o Support S.M.A.R.T, NCQ, and OOB staggered spin-up capable drives
- o Support SATA or SATA II drives.



Personal Storage at Enterprise Performance!


YOTTA Mini. It combines the new generation SATA-II hard drive interface with high performance Ultra 320 SCSI/4Gb fibre channel host connection and its superior RAID level 6 protection makes this entry-level RAID lightening fast as well as incredibly reliable.

Yotta Mini-Sport 4Gb enhancement!


The entry level YOTTA SCSI/4Gb fibre to SATA II RAID subsystem is an ideal solution for those who are willing to take the maximum advantage of lower-Cost and data security protection. It could be the smallest 4Gb fibre storage unit on the market.

Yotta Mini-Sport equipped with RAID 6, enhanced data Security

It is the embodiment of AXUS' sophisticated RAID 6 technologies, boosting superior performance, extreme reliability and exceptional data availability for today's data-intensive storage environments

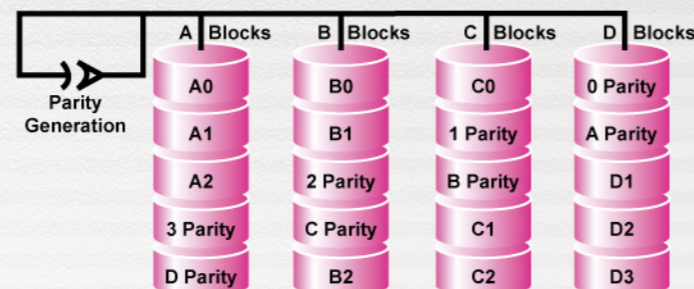

Web Management

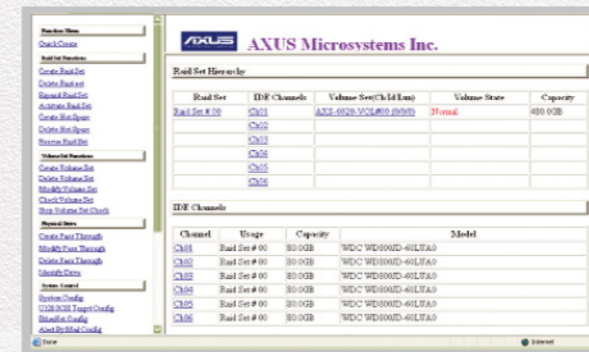

Easy but powerful web based manager, enables the entire RAID configuration at your finger tips.

Hardware Specification of YOTTA Mini

Model	YI-06SAEU4N-D2 U4 SCSI	YI-06SApEF4N 4Gb Fibre
Controller #	1	
RAID Levels	0, 1, 3, 5, 6, 0+1, JBOD	
Cache Support (Write back)	Fixed 128MB DDR SDRAM onboard with ECC Protection	
System Type	Tower	
Host Interface	Single Ultra 320 SCSI Channel/Dual 4Gb Fibre Channel	
Host Transfer Rate	320MBs/4Gbs	
Disk Interface	SATA II	
Hot Swap and Redundant	Yes (Hard Disk, Fan Module), Optional Redundant Power Supply	
Disk Channel	6 Disk Channels	
LAN	Web browser-based RAID Manager via Build in 10/100 Ethernet Port	
Online Array Roaming	Yes	
Online Capacity Expansion and RAID Level Migration	Yes	
Power Supply	Single 300 ATX Power Supply / Optional Redundant Dual 250W Power Modules with PFC Feature	
Dimensions	166mm(W)*288mm(D)*346mm(H)	

Specification subject to change without notice. All trademarks or registered trademarks are properties of their respective owners.



Axus Microsystems Inc.
Sales information:sales@axus.com.tw
Axus web site:www.axus.com.tw

Tel: 886-2-323488686 Fax: 886-2-32341515
12F., No. 800, Chung Cheng RD., Chung Ho City Taipei
Hsien, Taiwan, R.O.C